

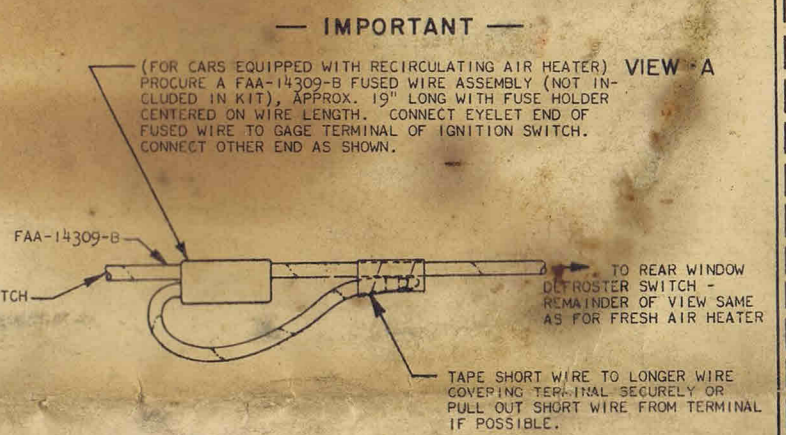


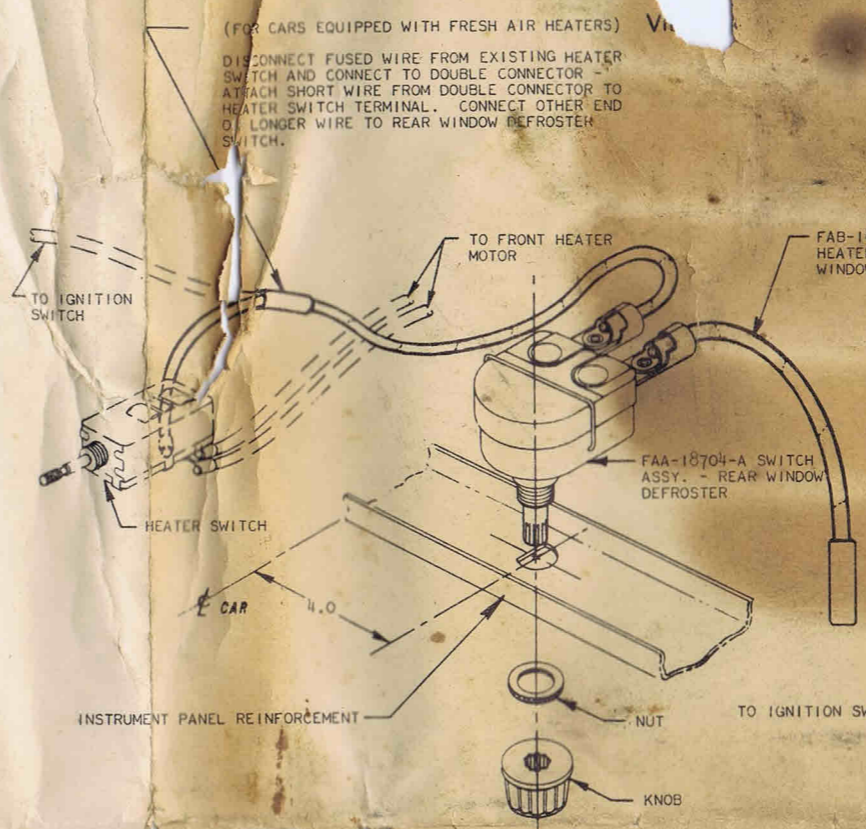



FORD MOTOR COMPANY

DEARBORN MICHIGAN

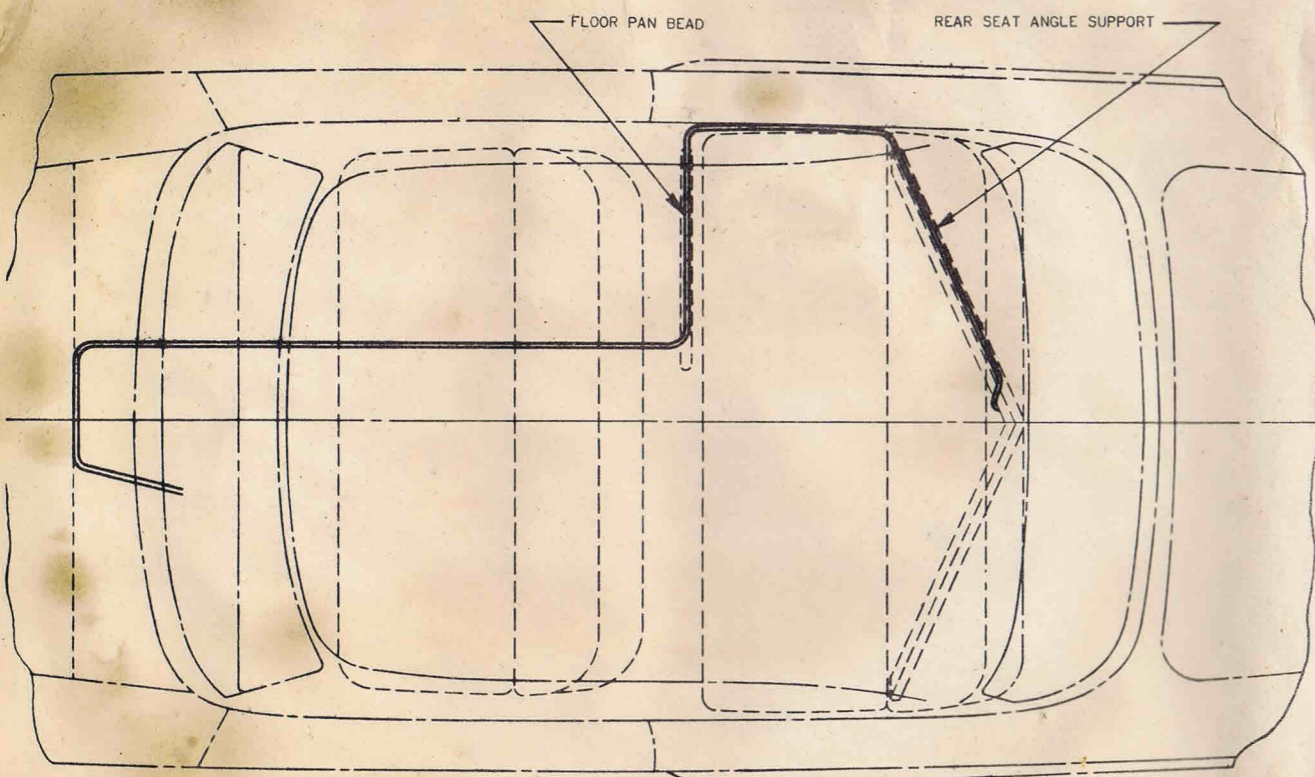

AFTER HOLES ARE LOCATED & CUT OUT OF CARDBOARD TRIM, ON L.H. SIDE OF CAR, WITH USE OF TEMPLATE, PUT GRILLE FAA-18640-A IN PLACE FROM INSIDE OF CAR. INSTALL DEFROSTER ASSEMBLY, FAA-18630-A FROM BOTTOM AND ATTACH WITH 34052-S8 NUT (4 REQD.) AND 34938-S7 WASHER (4 REQD.)

KEEP GROUND WIRE TAUT WHEN LOCATING HOLE FOR GROUNDING SCREW IN REINFORCING BEAD. DRILL #33 (.113 DIA.) HOLE IN BEAD FOR GROUND WIRE. TAKE CARE NOT TO GO THROUGH CARDBOARD TRIM PANEL, GROUND SCREW 41554-S8 (1 REQD.)

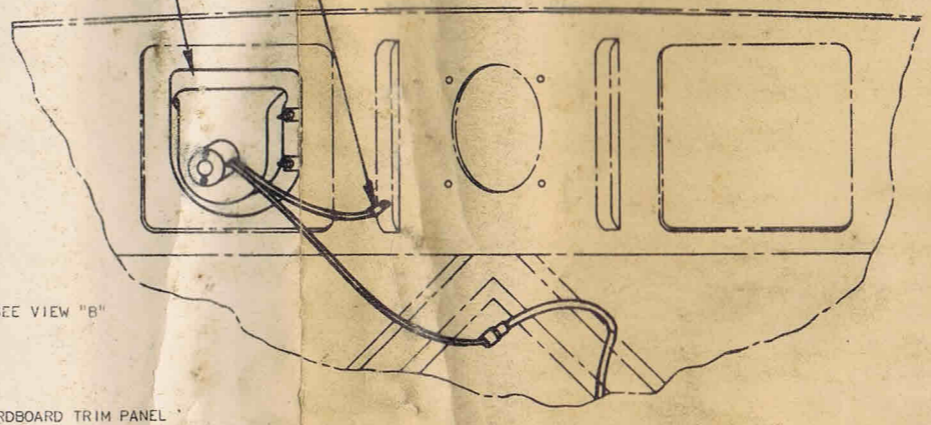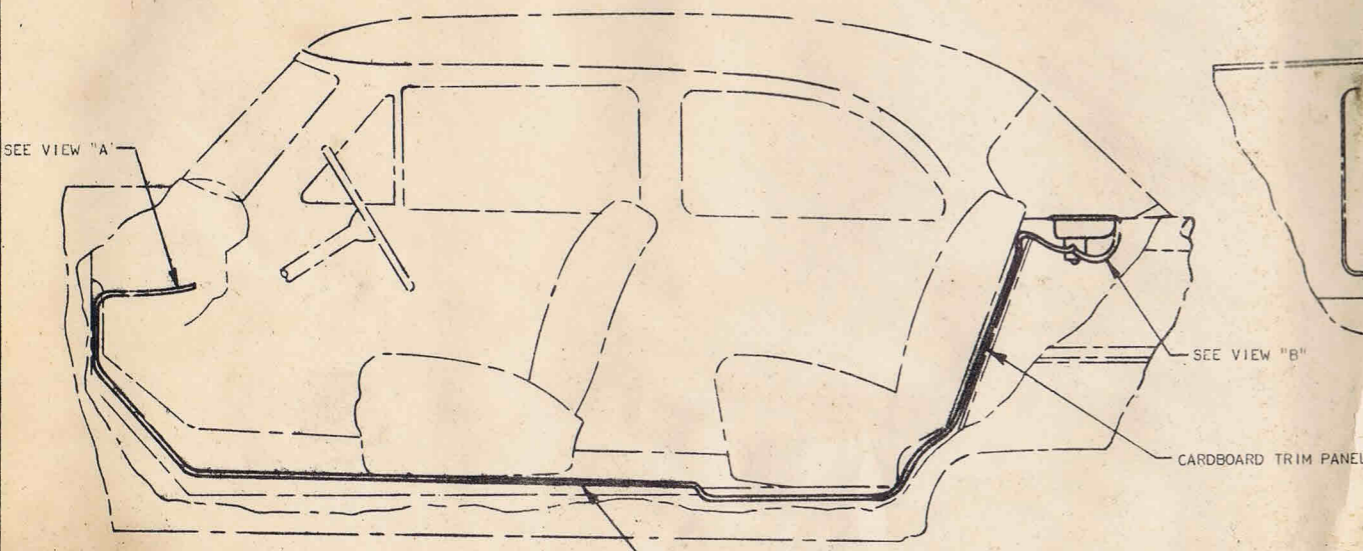

VIEW - B

FAB-18397-A KIT - REAR WINDOW DEFROSTER CONSISTS OF		
PART NUMBER	PART NAME	REQD.
FAB-14340-A	WIRE ASSY. - HEATER SW. TO REAR WINDOW DEFROSTER	1
FAA-14353-A	WIRE ASSY. - HEATER SW. TO REAR WINDOW DEFROSTER SW. - JUMPER	1
FAA-18630-A	DEFROSTER ASSY - REAR WINDOW	1
FAB-18640-A	GRILLE - REAR WINDOW DEFROSTER	1
FAA-18704-A	SWITCH ASSY - REAR WINDOW DEFROSTER	1
34052-S8	NUT #8 - 32 HEX. HD.	4
34938-S7	WASHER #8 EXT. TOOTH LOCK	4
41554-S8	SCREW #8 - 32 X 3/8 SELF-TAPPING	1
SK-3469-FAB-B	TEMPLATE	1
SK-FAB-18397-A	INSTALLATION SHEET	1

ROUTE FAB-14340-A WIRE ASSY. UNDER CARPET BENEATH FRONT SEAT & BEHIND LUGGAGE COMPARTMENT CARDBOARD TRIM PANEL AS SHOWN.

NOTE: WHEN DEFROSTER UNIT IS INSTALLED, GRILLE (FAA-18640-A) MAY BE PAINTED TO MATCH RADIO REAR SEAT SPEAKER GRILLE.

INSTALLATION-KIT-REAR WINDOW DEFROSTER SK-FAB-18397-A

TO USE TEMPLATE, CUT OUT PATTERN CORRESPONDING TO CORRECT MODEL BODY TYPE. LINE UP EDGE OF TEMPLATE WITH THE LIGHTENING HOLE ON LEFT SIDE OF PACKAGE TRAY FROM INSIDE OF LUGGAGE COMPARTMENT. PUNCH WHERE FOUR HOLES ARE INDICATED, THROUGH PACKAGE TRAY CARDBOARD, AFTER THE FOUR HOLES ARE PUNCHED THROUGH, REMOVE TEMPLATE AND LINE IT UP WITH THE PUNCHED HOLES ON THE TOP SIDE OF PACKAGE TRAY TRIM PANEL. CUT OUT THE TWO LARGE HOLES FOR DEFROSTER UNIT.

TOWARD FRONT OF CAR

TEMPLATE OUTLINE FOR
FORD BUSINESS & CLUB COUPE

TEMPLATE OUTLINE FOR
FORD TUDOR & FORDOR

TEMPLATE OUTLINE
FOR FORD HARDTOP

FORM A-7370-A